

Finalit No. 21

Fixative Penetrating Stopper



- pre-treatment of strong absorbent materials
- pre-treatment before laying and jointing and for floors with floor heating, anti-slip effect
- closes coarse-pored surfaces (polished/unpolished)
- deep sealer, bonding agent for plaster and concrete

- pre-treatment before impregnation
- pH-value: not applicable
- color enhancer
- apply undiluted
- 1L treats up to 100m², depending on the absorbency of the material



1) The product – Finalit No. 21 Fixative Penetrating Stopper



a) Materials

Finalit No. 21 Fixative Penetrating Stopper ist suitable for marble, granite, stoneware, ceramic, terracotta, brick, clinker, Solnhofener stone, limestone, sandstone, natural stone, aggio terrazzo, terrazzo and concrete.

Finalit No. 21 Fixative Penetrating Stopper is not suitable for solvent-sensitive surfaces!


b) Characteristics

- contains resins
- does not contain wax, silicone or acrylate
- **Attention!** The product is used for pre-treatment, subsequent impregnation is recommended!

BEFORE STARTING TO WORK

- Take pictures of damages caused by daily cleaning and use of the premises, starting at the door, running clockwise.
- The bottom of wooden pieces of furniture (e.g. door frames) must be siliconed with transparent silicone, otherwise it may be damaged by water or detergent. Use special acid-resistant plastic tapes that do not cause adhesive residues!
- Switch off floor heating systems!

c) Application

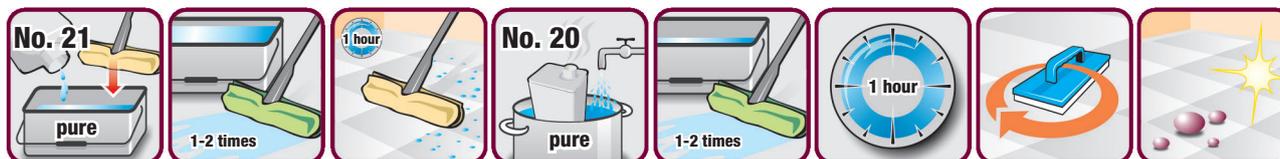

- temperature of the surface that has to be treated should be above +10°C
- surface that has to be treated must be clean
- apply only thin layers of the product, wipe away any excess immediately

Color enhancement for strong absorbent or lasered materials

- apply Finalit No. 21 Fixative Penetrating Stopper twice on the clean and dry surface (undiluted!)
- wipe away any excess immediately
- drying time: about 1 hour

We recommend to apply one of the Finalit impregnations afterwards! (e.g. Finalit No. 20 Hot Impregnation)

Color enhancement for polished materials

- apply Finalit No. 21 Fixative Penetrating Stopper on the clean and dry surface (undiluted!)
- wipe away any excess immediately
- drying time: about 1 hour
- polish the surface by using a white pad and a high-speed or single disc machine

We recommend to apply one of the Finalit impregnations afterwards! (e.g. Finalit No. 20 Hot Impregnation)

2) Pro tips for Finalit No. 21 Fixative Penetrating Stopper



a) Mode of action

Due to its specific components, Finalit No. 21 Fixative Penetrating Stopper is an excellent hardening agent for porous and chalky materials. It also serves as bonding agent for subsequent coatings.

c) Mode of action on plaster

Due to weathering and environmental influences sand grains of plaster loosen. In a depth of 2-3mm (where the lime is located) the stone becomes porous. Finalit No. 21 Fixative Penetrating stopper is able to consolidate loose parts.

3) Specification



Appearance	Fluid, colorless
pH value	Not applicable
Packaging	0,25l, 1l, 5l, 20l tin cans
Storage	Protect from frost. Recommended shelf life: 1 year after opening.

4) Security regulations



The common precautions when handling chemicals must be observed. Ensure good ventilation/extraction at the workplace. Prevent formation of aerosols. Keep away from food, beverages and animal feed. Remove soiled and contaminated clothing immediately. Wash your hands before breaks and when work is finished. Avoid any contact with eyes and skin.

5) Note



This product information is based on careful laboratory tests and extensive practical experience. These are informal details. We recommend to determine whether the product meets the respective needs by sufficient testing. Our company shall not be held responsible for damages resulting from improper use of the product.