

Finalit No. 23

High-Gloss Impregnation



- High-gloss, long-term protection against environmental influences.
- Freshens up the gloss of floors, gloss finish for matt floors.
- For interior use only! The drying time is approx. 1-2 hours.
- Dilutable with water up to 1:3
- 1l treats up to 50 m², depending on surface absorbability
- milky-white look
- pH value: 9 (alkaline)



1) The product– Finalit No. 23 High-Gloss Impregnation




a) Materials

Marble, Solnhofener stone, Limestone, Granite, Sandstone, Natural stone, Terracotta, Clinker, Brick, Agglo terrazzo, Terrazzo, Concrete, Washed concrete, Plaster, Wood, Parquet, Laminate, Plastic material, PVC, Rubber, Linoleum coverings.

BEFORE STARTING TOWORK

- Take pictures of damages caused by daily cleaning and the use of the premises, starting at the door, running clockwise.
- The bottom of wooden pieces of furniture (e.g. door frames) must be siliconed with transparent silicone, otherwise it may be damaged by water or detergent. Use special acid-resistant plastic tapes that do not cause adhesive residues!
- Already existing coatings have to be removed completely with Finalit No. 5 Coating Remover or with a low-odor mixture of Finalit No. 1 Intensive Cleaner, No. 5 Coating Remover and No. 39 Compact (1:1:1) before working on the stain removal. Otherwise the cleaners cannot work effectively! Sometimes coatings are not visible. Perform tests with a) a blade („scrape“) or b) spill water - if the water drips off, the surface is coated.
- Switch off floor heating systems!

b) Application:

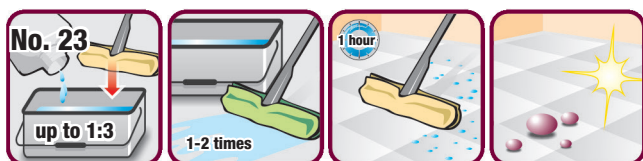

- Preclean after basic cleaning with Finalit No. 40 Citrus Scent Cleaner to remove residues!!!
- Extract dirty water.
- Wash again with wet mop, to remove hair and dust. The surface has to be totally clean and free of dust.
- Let dry, drying time depending on room temperature.
- The temperature of the object must be above +10°C.
- Apply Finalit No. 23 High-Gloss Impregnation undiluted to the clean and dry surface (1 to 2 times depending on surface absorbing capacity), spreading it evenly.
- If bubbles or streaks result from the application of Finalit No. 23 High-Gloss Impregnation, wipe away immediately. In this case, dilute Finalit No. 23 with a maximum of 1:1 warm water. When applied again, bubbles and streaks should no longer form.
- The drying time is approx. 1 - 2 hours. The gloss appears automatically. Subsequent brushing is not necessary.
- To refresh the gloss, just add a dash of Finalit No. 23 to the water used for mopping as required.
- Attention: With polished materials, use Finalit No. 23 with white synthetic pads and a high-speed machine to polish.
- Sample tests recommended!.
- For interior use only.

2) Pro tips for Finalit No. 23 High-Gloss Impregnation



a) Gloss refreshment

For refreshing the gloss, take a 1:10 mixture, that means you add 1 L of Finalit No. 23 High-Gloss Impregnation to a 10 L bucket of water.

b) Protection against de-icing salt in the entrance area

To protect an entrance area (already impregnated with Finalit No. 23 High-Gloss Impregnation, drying time min. 3 hours) against de-icing salt, apply additional No. 20 Hot Impregnation as thin as possible, wipe away immediately.

c) Grinding & polishing with Finalit No. 60 Grinding-/Polishing Powder

Slightly etched spots can be removed with Finalit No. 60 Grinding-/Polishing Powder. This cannot be applied to untreated scratches. Scratches should be grinded with corn No. 60, 220, 400, 800, if necessary put o 1.800. After removing the scratches (starting from grit 400), the area can be polished to high gloss with Finalit No. 60 Grinding-/Polishing Powder. Details can be found on the application sheet for Finalit No. 60 Grinding-/Polishing Powder. Subsequent impregnation with Finalit No. 21 Fixative Penetrating Stopper and Finalit No. 20 Hot Impregnation or Finalit No. 22 Cool Impregnation is recommended. Afterwards polish with high-speed-machine and white pad.

3) Specification



Appearance	Fluid, whitish
pH value	9
Packaging	0,25l, 1l, 5l, 25l Plastic container
Storage	Protect from frost. Recommended shelf life: 1 year after opening.

4) Security regulations



Ensure good ventilation/exhaustion at the workplace. Prevent formation of aerosols. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Do not inhale gases / fumes / aerosols.

5) Note



This product information is based on careful laboratory tests and extensive practical experience. These are informal details. We recommend to determine whether the product meets the respective needs by sufficient testing. Our company shall not be held responsible for damages resulting from improper use of the product.